



BLU Dash Music 4.0 Headphone Jack Replacement

This guide will teach you how to replace the headphone jack.

Written By: Lioma Terrero Soto





TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #0 Screwdriver](#) (1)
- [Soldering Station](#) (1)
- [Solder](#) (1)



PARTS:

- [Blu Dash 4.0 headphone jack](#) (1)

Step 1 — Remove the Back Cover




- Use the plastic opening tool or your fingernail to pry off the back cover.

Step 2 — Remove the Battery




- Use the plastic opening tool or your fingernail to pry off the battery from the top right corner.

Step 3 — Remove the Screws

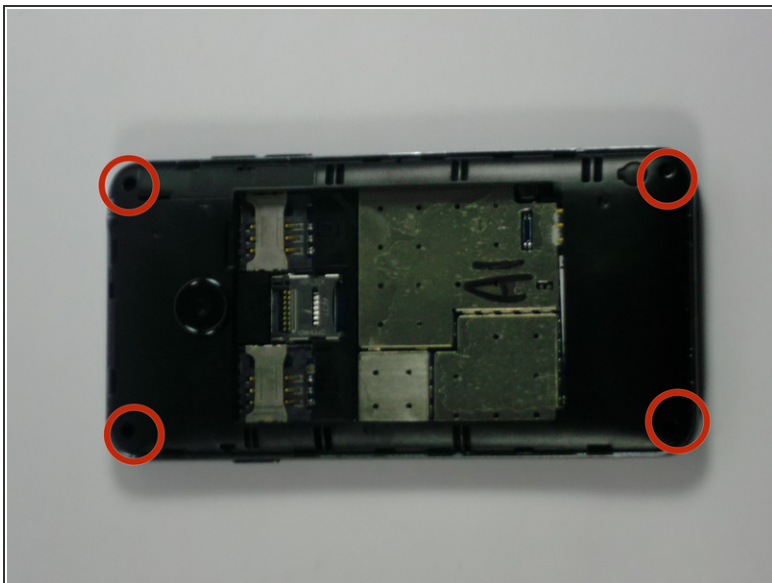



- Use a screwdriver to remove each of the four screws.

Step 4 — Remove the Inner Cover

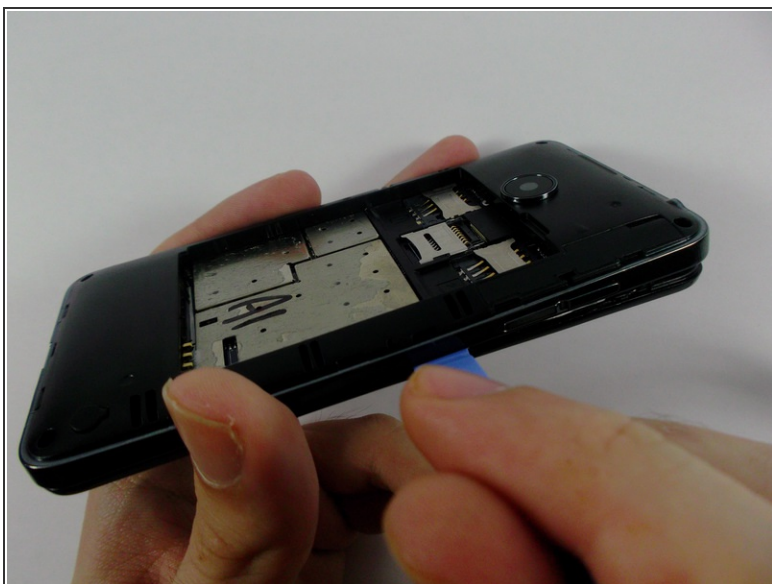



- Take the plastic opening tool and insert it in the crease between the front screen and the inner back cover.
- Slide the plastic opening tool along the edge of the phone to pry the two covers apart.

Step 5 — Remove the Black Pad

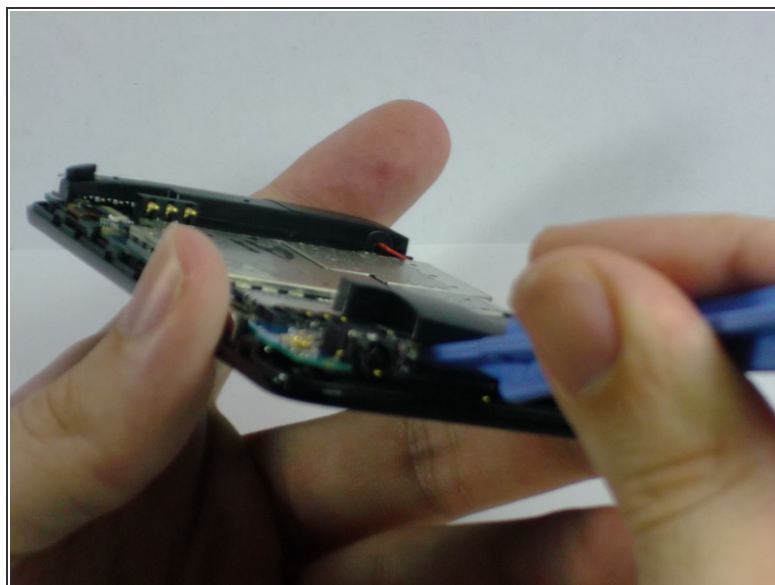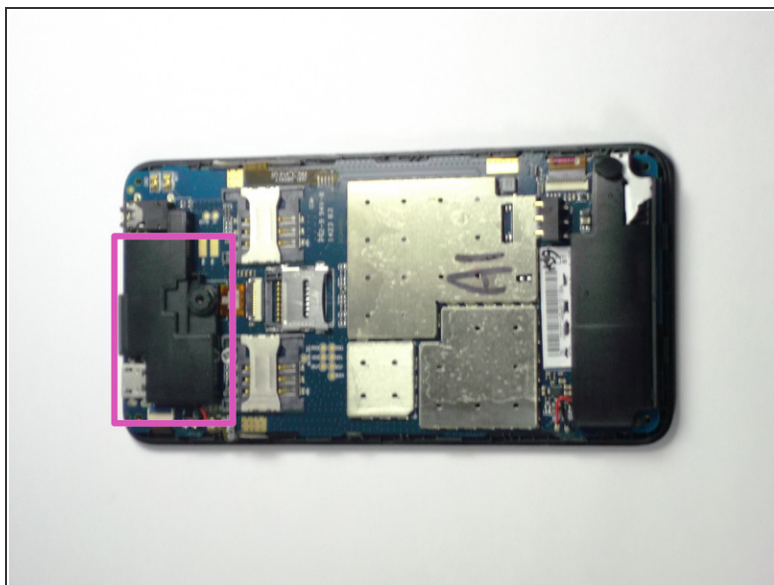


- Insert the plastic opening tool between the black pad and the circuit board. Then gently pry off the black pad.
- This will make the connections of the charging port more accessible.

Step 6 — Remove the Solder Connections

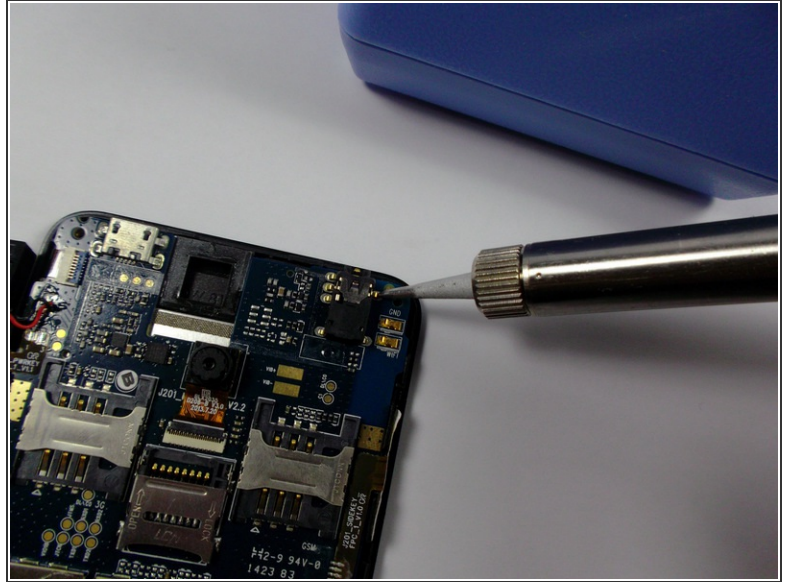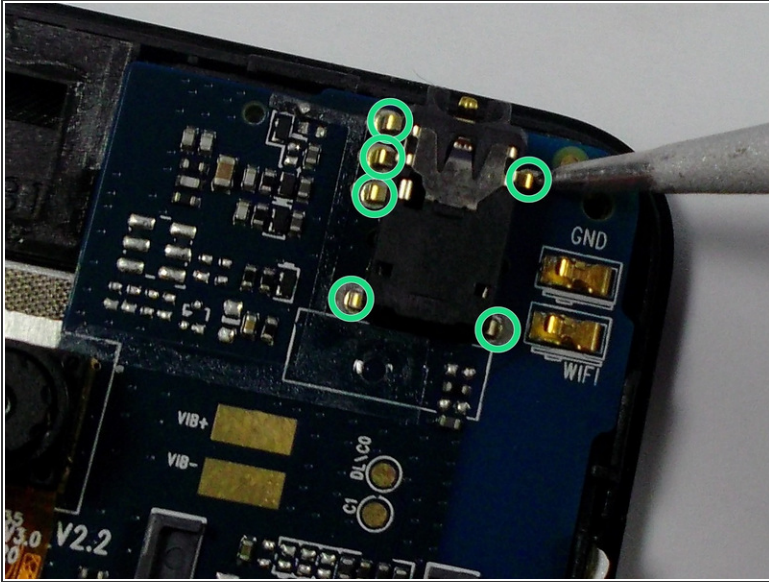

- Using a soldering iron and a pair of pliers, melt the soldering connections around the headphone jack.
- Quickly pull off the current headphone jack while the soldering connections are still soft.

Step 7 — Mount the New Headphone Jack

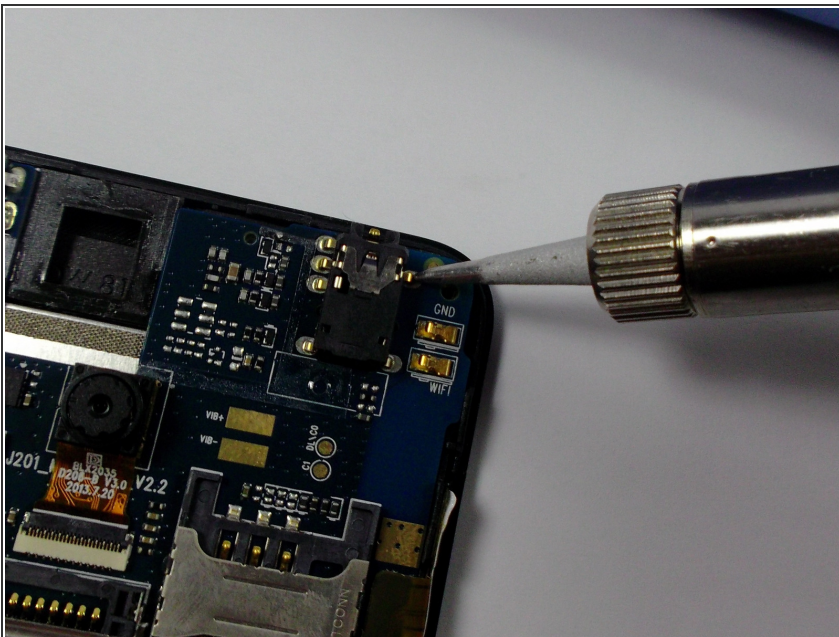

- Mount the new headphone jack such that the prongs of the headphone jack line up with the soldering connections.
- Using a soldering iron, solder the connections in place.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-06 07:08:16 PM.